


TCOM 417-01

BSC Filters Limited
10-11 Stirling Park, Bleriot Way
Clifton Moor, York, YO30 4WU. UK
Telephone: +44 (0) 1904 694250
E-mail: sales@bscfilters.com
Web-site: www.bscfilters.com

CERAMIC BANDPASS FILTER

This filter is designed to cover the WCDMA GSM LTE Band 8 with low loss and high roll-off at the band edges. Primarily designed for use in GSM jammers.

Centre Frequency:	942.5 MHz
Insertion Loss at Centre Frequency:	4.5 dB max
2 dB Passband:	925 to 960 MHz
Return Loss:	14 dB min
Rejection from DC to 888 MHz:	50 dB min
Rejection from 997 MHz to 8.0 GHz:	50 dB min
Power Handling:	2 W CW max
Operating temperature:	-10 to 50°C
Connectors:	SMA Female
External Finish:	Matt Black

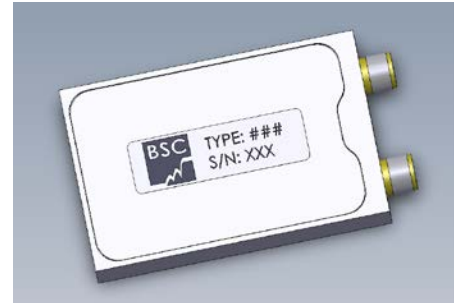

Outline:

